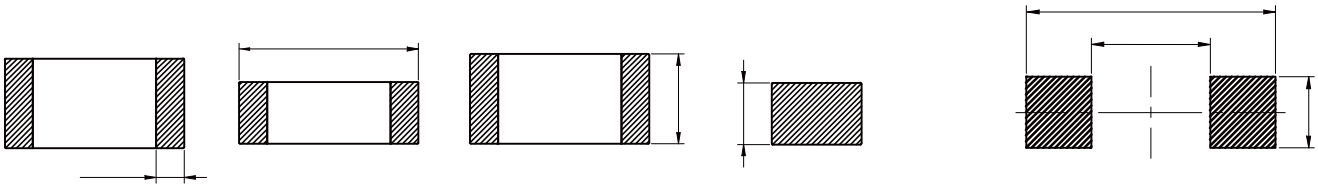


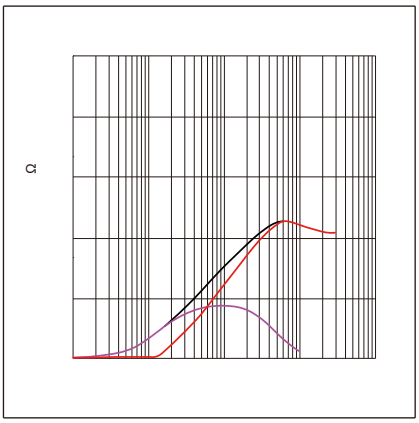
- Noise reduc on solu on for power line.
- Compa ed t the series, has l di ect cur t esistance for compa bility with lage currents,op mal for low power consump on. Various frequency characteris cs with m terials of di t f tu es f c termeasu es a ainst rything f om al signals t high-speed signals.
- forms ell in signal lines whe l di ect cur t esistance is equi ed.
- AEC-Q200 qualified
- Opera ng temperature: -55 to +150 °C(including self-temperature rise)
- Quan ty: 3000pcs

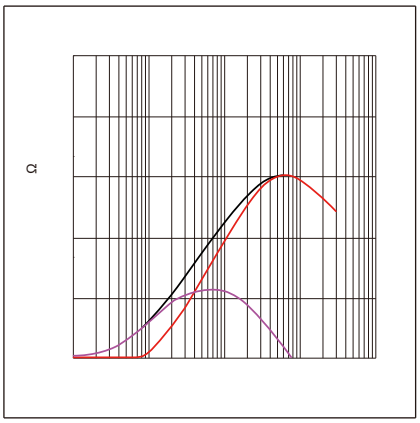
- Power line filter for body controls, and car mul media etc.

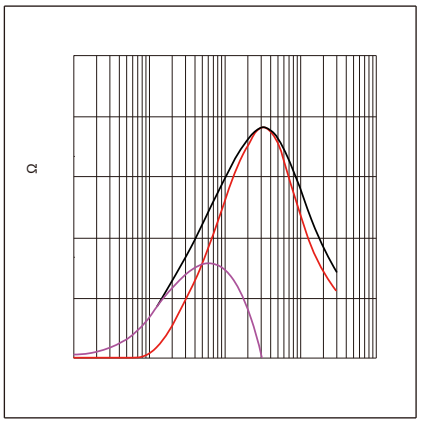


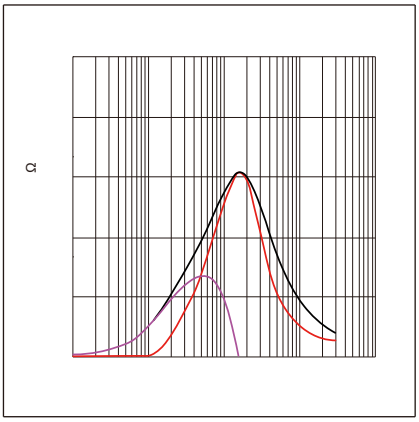
	(Ω)		(Ω)	(mA)
		%		
		%		
		%		
		%		
		%		
		%		
		%		
		%		

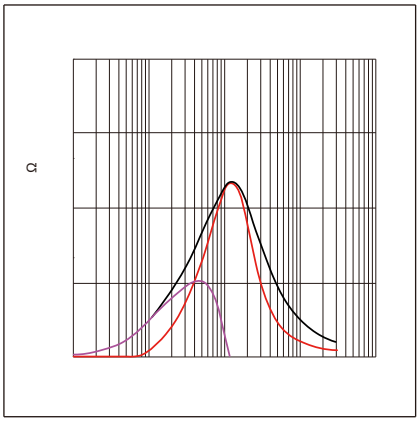
△

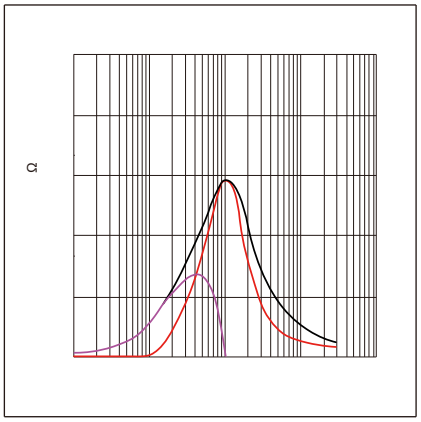

Ω

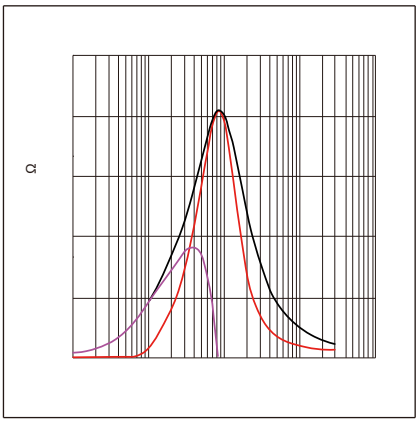

Ω

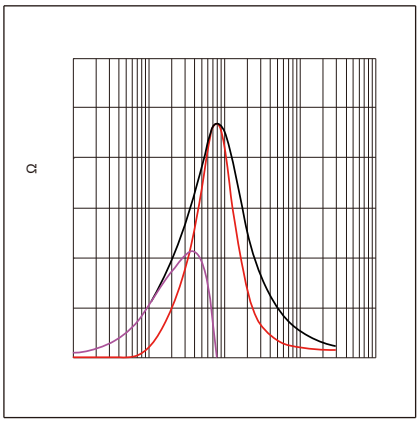

Ω


Ω


Ω


Ω

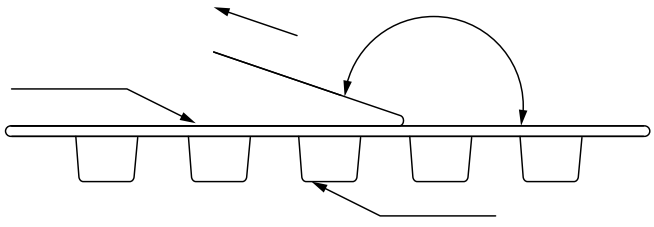

Ω


Ω

:

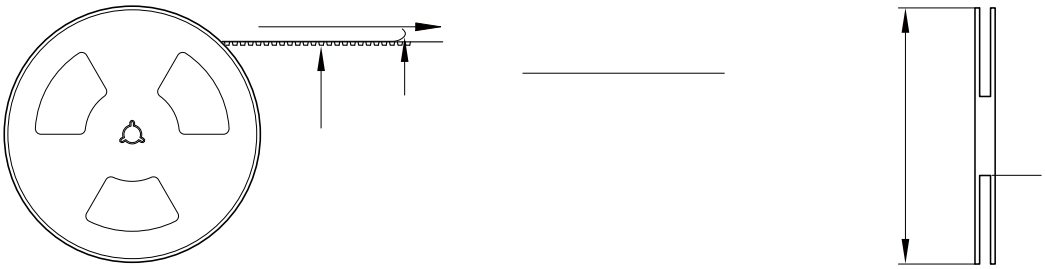


FBHA1206S	1.75 ± 0.1	3.35 ± 0.1	1.5 ± 0.1	4.0 ± 0.1	4.0 ± 0.1	8.0 ± 0.3	1.25 ± 0.1	1.75 ± 0.1	0.23 ± 0.05



The peel force of top cover tape shall be between 0.14 to 0.58 N

:



:

-
-
-
-
-
-
-