MD Series

SMD Low Profile High Current Molded Inductor

Size 1870




FEATURES

- Molded type
- High satura on current due to CIP material
- Nature air gap and no acous c noise
- Di erent sizes available
- Opera ng temperature range - 40 °C to + 125 °C
- Quan ty: 200pcs


APPLICATION

- High current DC/DC converter
- LC filter

Dimensions: [mm]

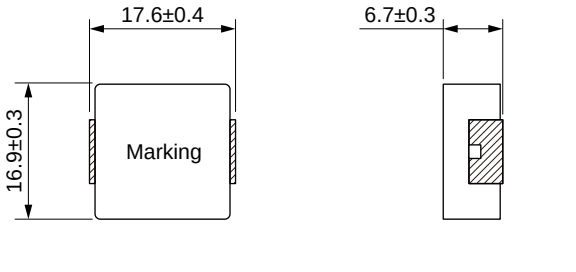

Land Pattern: [mm]



Electrical Properties:


	(μH)			Saturation	(mΩ)	(mΩ)
MD1870-R45M	0.45	±20%	62.0	125	0.80	0.96
MD1870-R47M	0.47	±20%	62.0	123	0.95	1.03
MD1870-1R0M	1.00	±20%	52.0	70	1.60	2.00
MD1870-1R5M	1.50	±20%	47.0	65	2.00	2.50
MD1870-2R2M	2.20	±20%	43.5	62	2.40	2.70
MD1870-3R3M	3.30	±20%	28.0	54	3.50	3.90
MD1870-4R7M	4.70	±20%	25.0	50	4.80	5.50
MD1870-5R6M	5.60	±20%	21.0	45	5.80	7.05
MD1870-6R8M	6.80	±20%	19.0	39	8.40	9.20
MD1870-8R2M	8.20	±20%	18.0	31	9.60	10.8
MD1870-100M	10.0	±20%	16.5	29	11.8	13.0
MD1870-150M	15.0	±20%	12.5	27	17.8	20.5
MD1870-220M	22.0	±20%	12.0	23	25.1	26.5
MD1870-330M	33.0	±20%	10.7	20.	38.0	44.0
MD1870-470M	47.0	±20%	8.70	16	48.0	55.0
MD1870-560M	56.0	±20%	7.80	15	54.0	62.0


KOHER Electronics
F9, No. 4188, Huaning Rd, Minhang District, Shanghai
021-34753361 Contact@kohergroup.com


	(μH)			Saturation	(mΩ)	(mΩ)
MD1870-680M	68.0	±20%	7.0	13	68	80
MD1870-820M	82.0	±20%	5.7	12	87	100
MD1870-101M	100	±20%	5.3	12	102	118


Temperature rise current : The actual value of DC current when the temperature rise is ΔT40℃
Satura on Current will cause L to drop approximately 30%


Typical Electrical Characteristics:

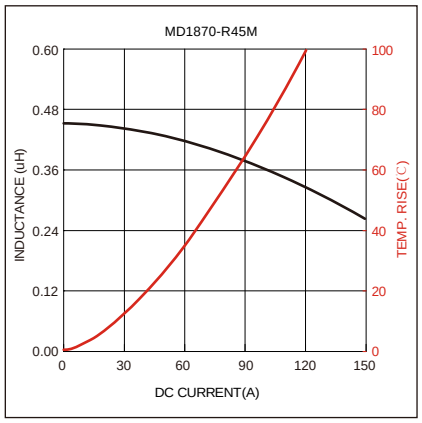


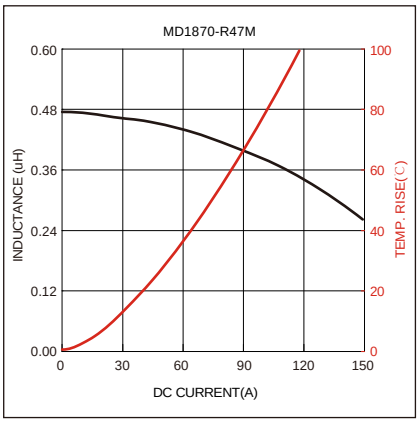


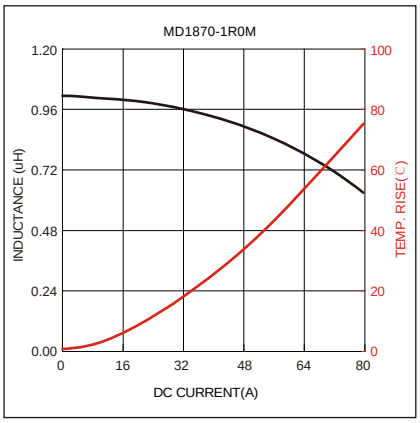


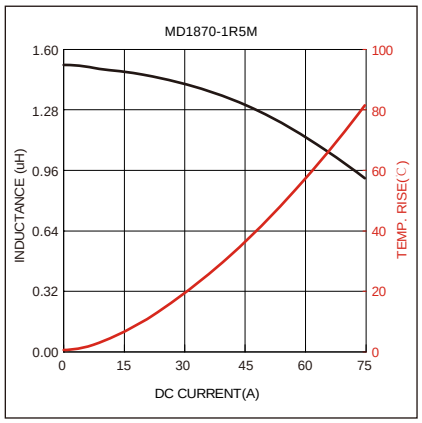


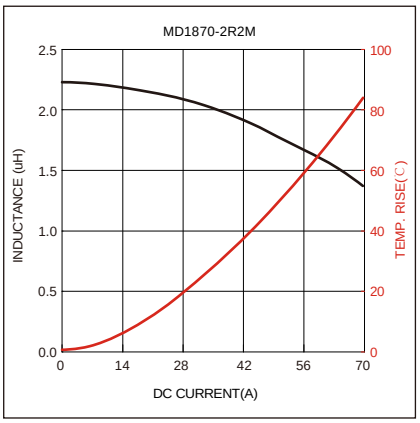

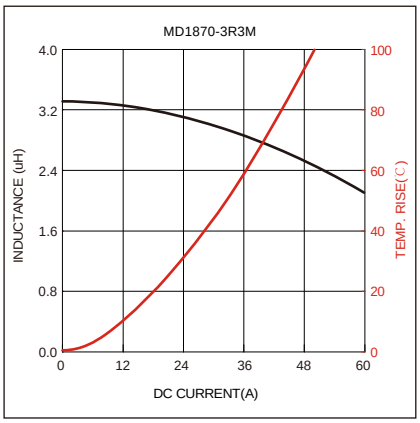

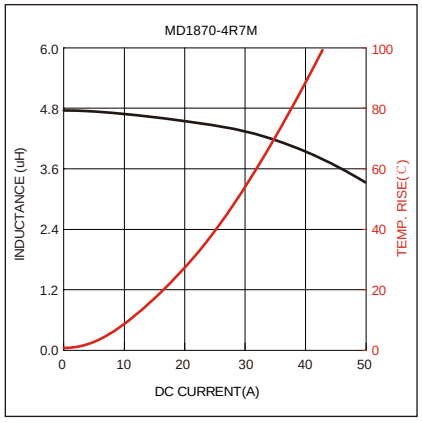

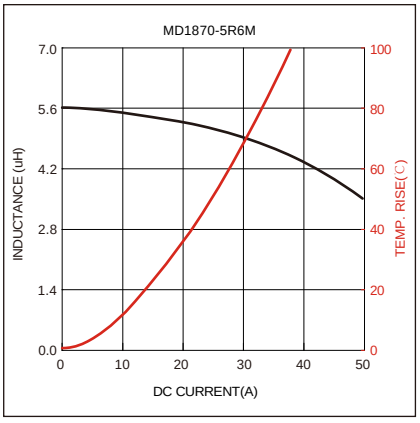

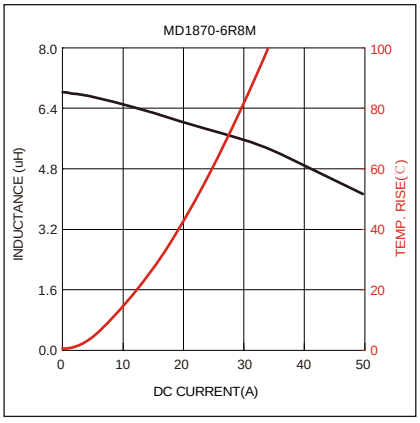

KOHER Electronics
F9, No. 4188, Huaning Rd, Minhang District, Shanghai
021-34753361 Contact@kohergroup.com

