

SMD Moulded Inductor
Size 5040




- Ultra low buzz noise, due to composite construc on
- AEC-Q200 qualified
- Opera ng temperature: -55 to +165 °C (including self-temperature rise)
- Quan ty: 1500PCS

- Headlamps, tail lamps and interior ligh ng
- Doors, window li and seat control
- In-Vehicle Infotainment and naviga on

Dimensions: [mm]

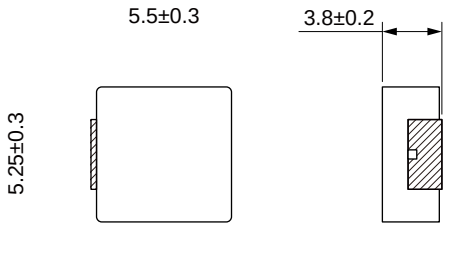

Land Pattern: [mm]





Electrical Properties:


	(µH)			Saturation	(mΩ)	(mΩ)


Saturation Current will cause L to drop approximately 35%
Temperature Rise Current: The actual value of DC current when the temperature rise is △T=40°C


Typical Electrical Characteristics:

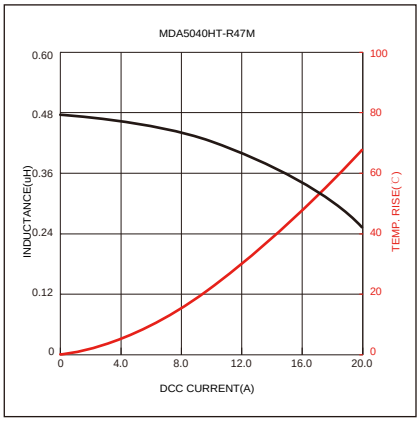


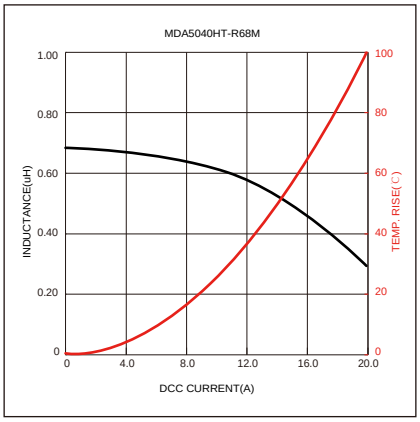


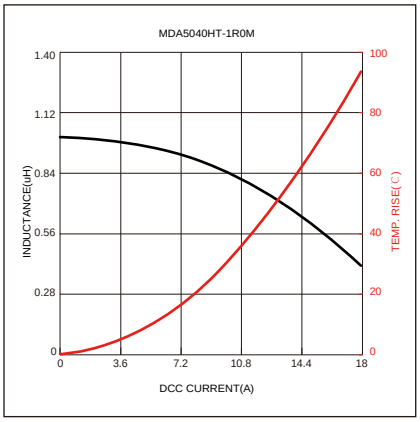


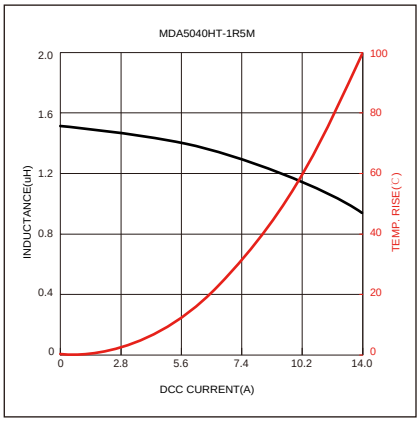


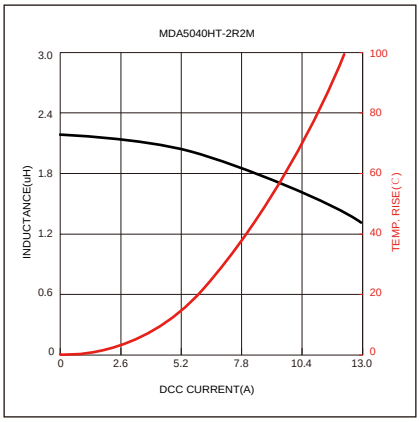


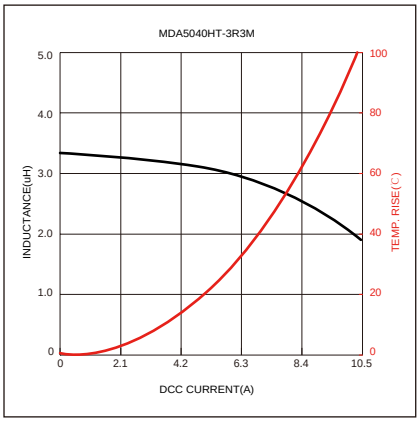


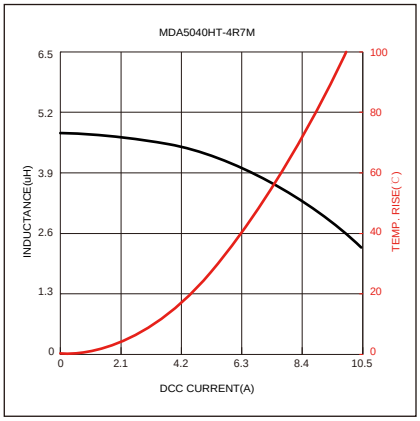

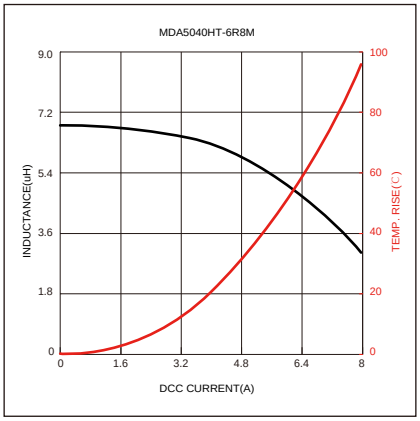

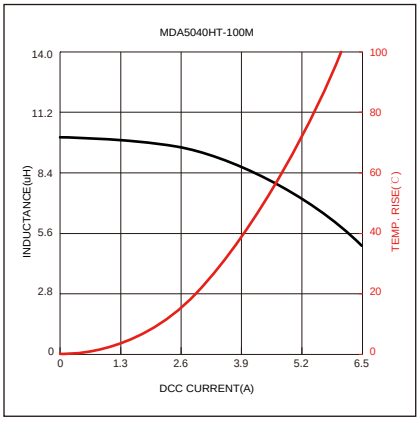

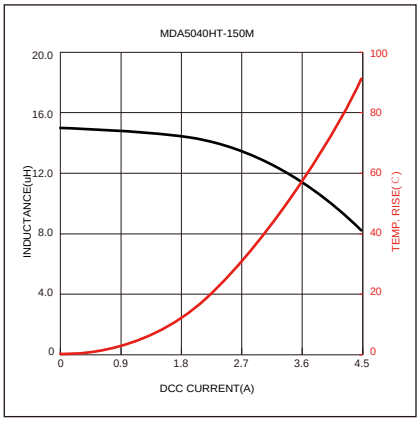

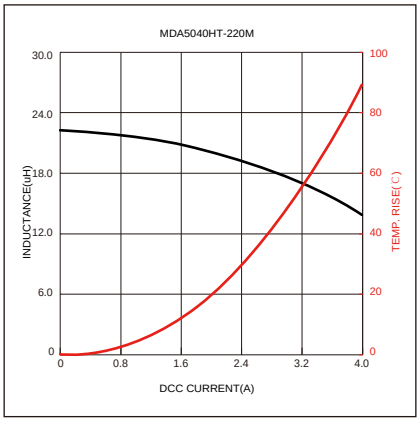

Reel Dimension：[mm]



Packaging Quantity: