SCM Series





FEATURES


- Suppression of asymmetrical interference coupled in on lines, whereas data signals up to some MHz can pass una ectedly
- Low profile design makes it op mal for surface moun ng Excellent impedance characteris cs, making it great for suppressing common mode noise.
- Opera ng temperature: -40°C to +85°C
- Quan ty: 1500pcs


APPLICATION


- CAN bus, FlexRay system

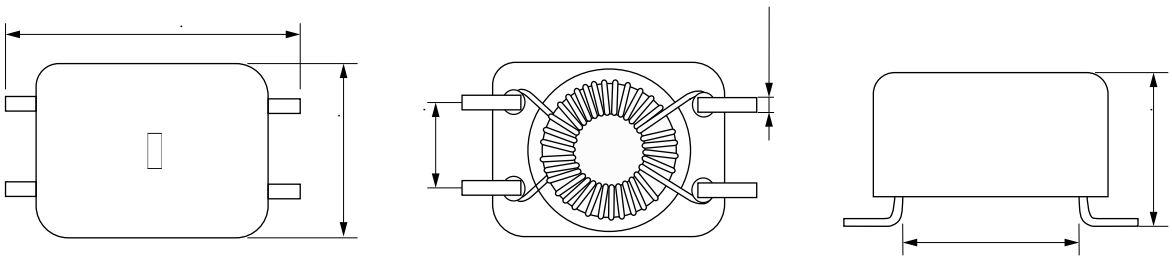




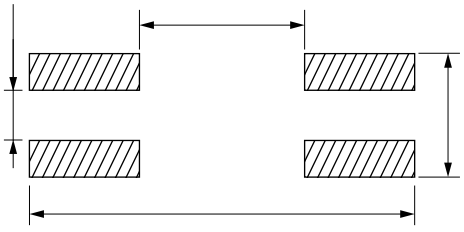


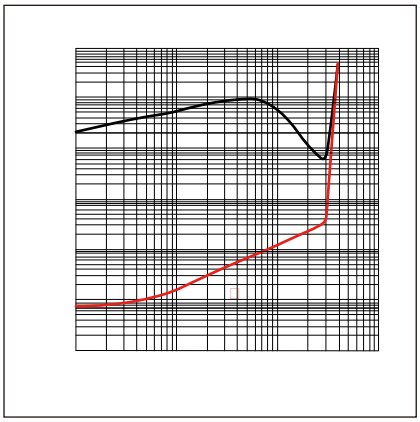

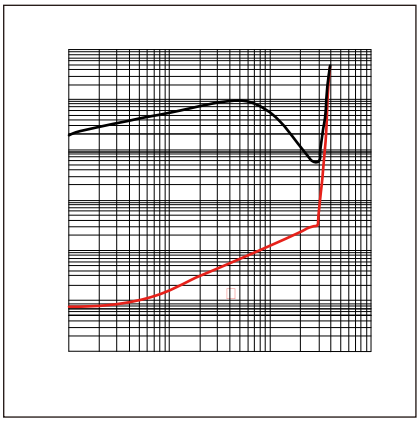

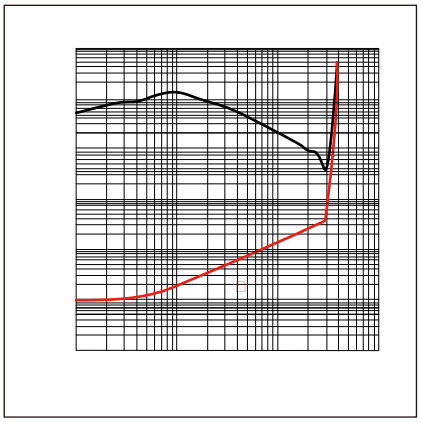

□

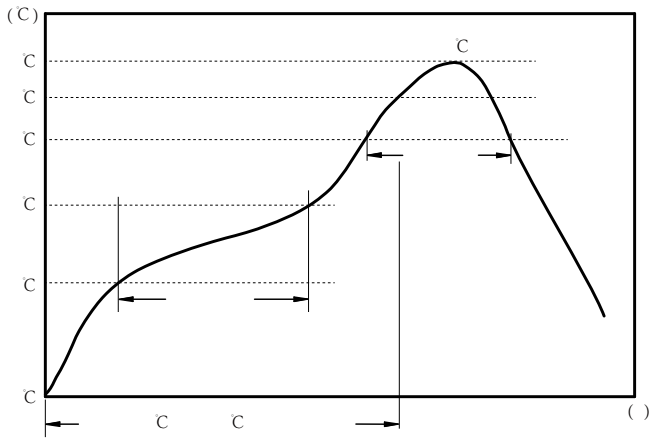

□ C


C

□ □ C

□ □

□


:

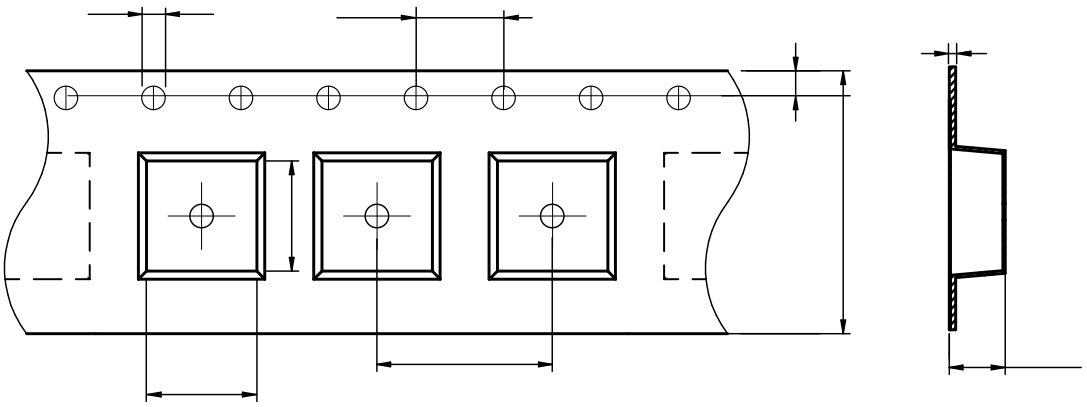

□									
SCM9040	5.85±0.1	9.60±0.1	1.5±0.1	4.0±0.1	8.0±0.1	16.0±0.3	4.92±0.1	1.75±0.1	0.50±0.05


□ □


Marking	Printing (Inductance)

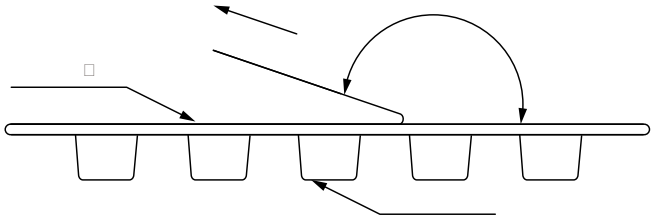

The peel force of top cover tape shall be between 0.1 to 1.17 N

:

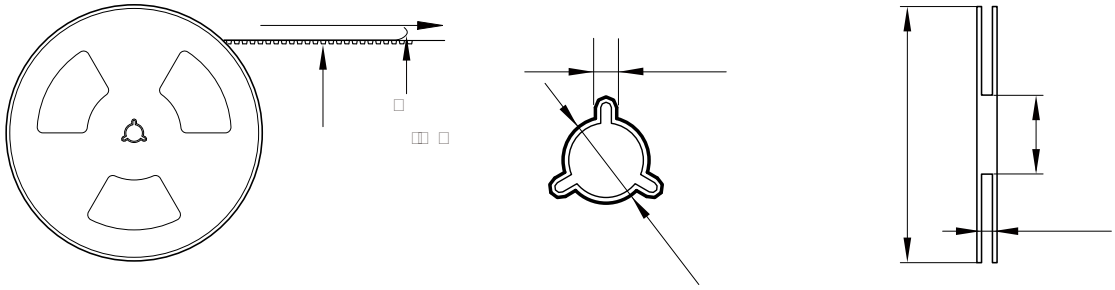

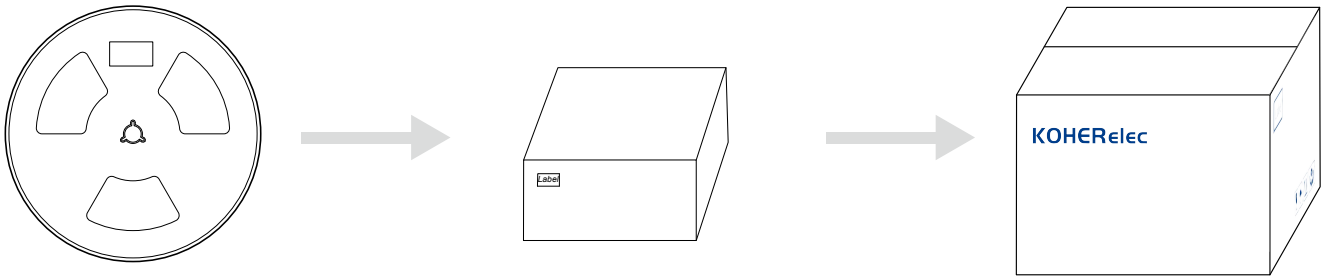

1500 Pcs/Reel

3 Reel /Inner box(4500 Pcs)

3 Inner box/Carton box(13.5K Pcs)

: